
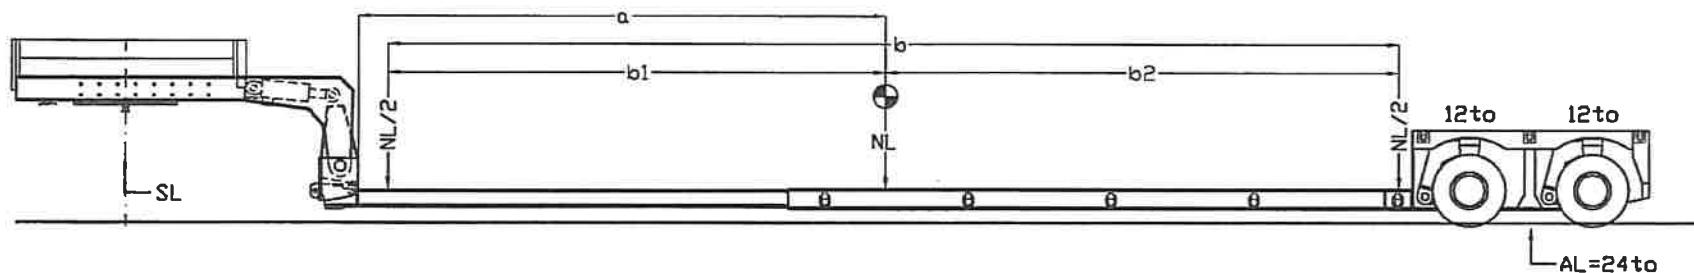


Nutzlastschwerpunkt bei 11/17.5/22.5to 'SL' und 24to 'AL'

Maximale Nutzlast auf Ladeplattform

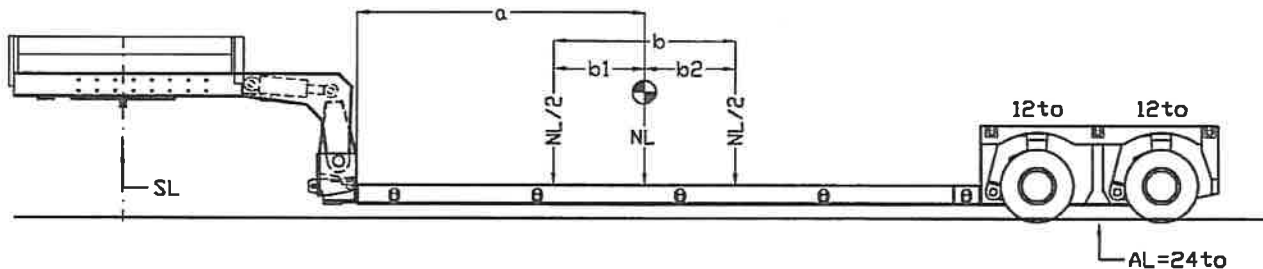

Plattformlänge (mm)	Auszug (mm)	Maß "a" (mm)	Sattellast "SL" (to)	Achslast "AL" (to)	Nutzlast "NL" (to)	Min. Auflageabstand "b" min. (mm)
6850	0	5700/3700/2800	11/17.5/22.5	24	22/28.5/33.5	2000
7850	1000	6350/4300/3300	11/17.5/22.5	24	22/28.5/33.5	5000
8850	2000	7100/4900/3800	11/17.5/22.5	24	22/28.5/33.5	6100
9850	3000	7850/5500/4350	11/17.5/22.5	24	22/28.5/33.5	7200
10850	4000	8600/6150/4900	11/17.5/22.5	24	22/28.5/33.5	8300
11850	5000	9400/6800/5450	11/17.5/22.5	24	22/28.5/33.5	9400
12350	5500	9900/7150/5750	11/17.5/22.5	24	22/28.5/33.5	10000

Ladung selbsttragend innerhalb Auflageabstand "b"

Ch... 13431

XF2-0071'''			BELASTUNGSSCHEMA	
gez.	28.09.10	Schür	MEGAMAX-Z2HVA/6.85+5.5/PA	
gepr.				
			Schwarzenboch 12 Tel.: ++32/80/64 01 55 B-4760 BOLLINGEN Fax.: ++32/80/64 01 51	
			Megamax	